

描述 / Descriptions

PDFN3×3A-8L 塑封封装 P 沟道 MOS 场效应管。

P-Channel Enhancement Mode Field Effect Transistor in a PDFN3×3A-8L Plastic Package.

特征 / Features

$V_{DS} (V) = -60V$ $I_D = -23A (V_{GS} = \pm 20V)$

$R_{DS(ON)} @ -10V \leq 40m\Omega$ (Typ. $36m\Omega$)



$R_{DS(ON)} @ -4.5V \leq 50m\Omega$ (Typ. $44m\Omega$)

符合 AEC-Q101 标准高可靠性要求，无卤产品。Qualified to AEC-Q101 Standards for High Reliability, HF Product.

用途 / Applications

笔记本交流输入负载开关，电池保护充电/放电，满足汽车应用的严格要求。

Notebook AC-in load switch, Battery protection charge/discharge, Meet the stringent requirements of automotive applications.

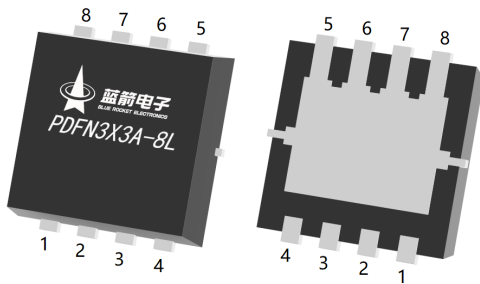内部等效电路 / Equivalent Circuit**引脚排列 / Pinning**

出脚	定义
Pin1	S
Pin2	S
Pin3	S
Pin4	G
Pin5	D
Pin6	D
Pin7	D
Pin8	D

印章代码 / Marking

见印章说明。

See Marking Instructions.

极限参数 / Absolute Maximum Ratings(Ta=25°C)

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Drain-Source Voltage	V _{DSS}	-60	V
Gate-Source Voltage	V _{GSS}	±20	V
Continuous Drain Current	I _D (T _c =25°C)	-23	A
Pulsed Drain Current	I _{DM}	-73	A
Avalanche Current	I _{AS}	17.5	A
Avalanche energy L=0.5mH	E _{AS}	320	mJ
Power Dissipation for Single Operation	P _D (T _c =25°C)	35	W
Maximum Junction Temperature	T _J	150	°C
Storage Temperature Range	T _{stg}	-55 ~ 150	°C
Thermal Resistance-Junction to Ambient	R _{θJA}	65	°C/W
Thermal Resistance- Junction-to-Case	R _{θJC}	3.6	°C/W

电性能参数 / Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Drain-Source Breakdown Voltage	BV _{DSS}	I _D =-250μA V _{GS} =0V	-60			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =-60V V _{GS} =0V			-1.0	
Gate-Body leakage current	I _{GSS}	V _{DS} =0V V _{GS} =±20V			±100	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} I _D =-250μA	-1.0	-	-2.5	V
Static Drain-Source On-Resistance	R _{DS(ON)}	V _{GS} =-10V I _D =-10A		36	40	mΩ
		V _{GS} =-4.5V I _D =-5A		44	50	
Diode Forward Voltage	V _{SD}	I _S =-1A V _{GS} =0V			-1.0	V
Gate Resistance	R _g	V _{GS} =0V V _{DS} =0V f=1MHz		5.0		Ω
Input Capacitance	C _{iss}	V _{GS} =0V V _{DS} =-15V f=1MHz		2500		pF
Output Capacitance	C _{oss}			180		
Reverse Transfer Capacitance	C _{rss}			120		

电性能参数 / Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Total Gate Charge	$Q_{g(10V)}$	$V_{GS}=-10V$ $V_{DS}=-30V$ $I_D=-6.2A$		46.5		nC
Total Gate Charge	$Q_{g(4.5V)}$			22.7		
Gate-Source Charge	Q_{gs}			9.1		
Gate-Drain Charge	Q_{gd}			9.2		
Turn-on Delay Time	$t_{d(ON)}$	$V_{GS}=-10V$ $V_{DS}=-30V$ $R_L=4.7\Omega$ $R_{GEN}=3\Omega$		9.8		ns
Turn-on Rise Time	t_r			6.1		
Turn-off Delay Time	$t_{d(OFF)}$			44		
Turn-off Fall Time	t_f			12.7		

电参数曲线图 / Electrical Characteristic Curve

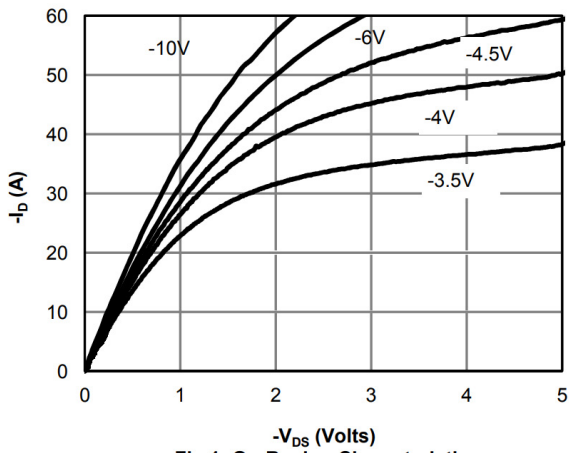


Fig 1: On-Region Characteristics

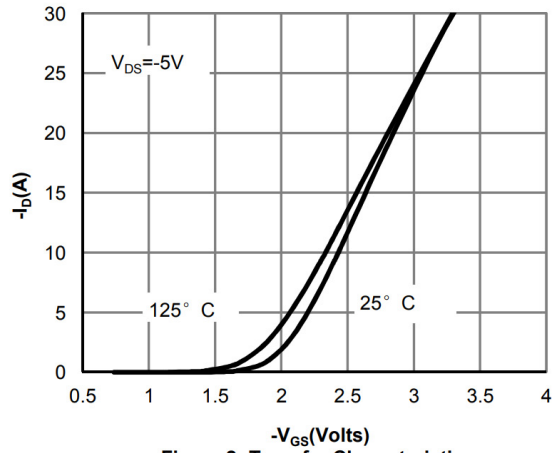


Figure 2: Transfer Characteristics

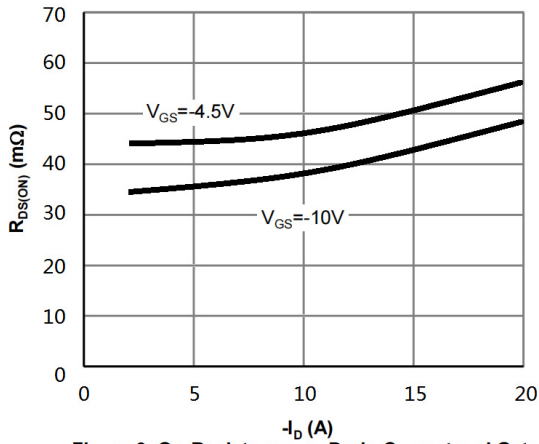


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

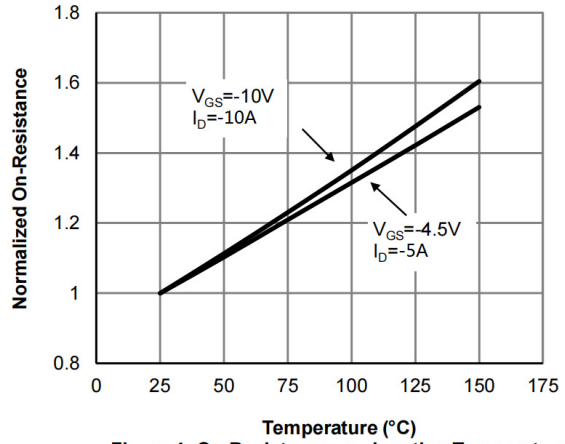


Figure 4: On-Resistance vs. Junction Temperature

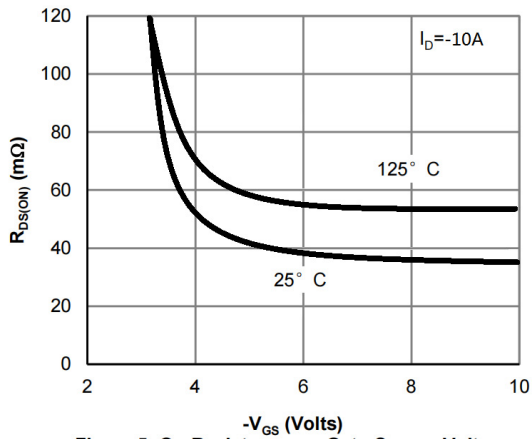


Figure 5: On-Resistance vs. Gate-Source Voltage

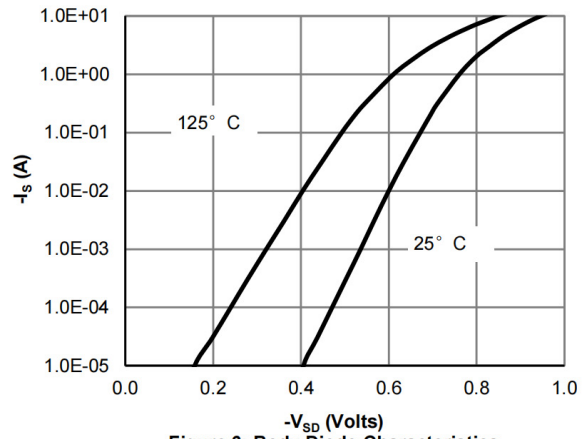


Figure 6: Body-Diode Characteristics

电参数曲线图 / Electrical Characteristic Curve

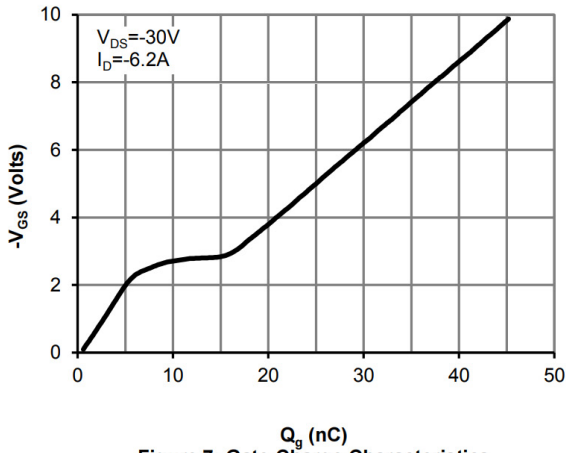


Figure 7: Gate-Charge Characteristics

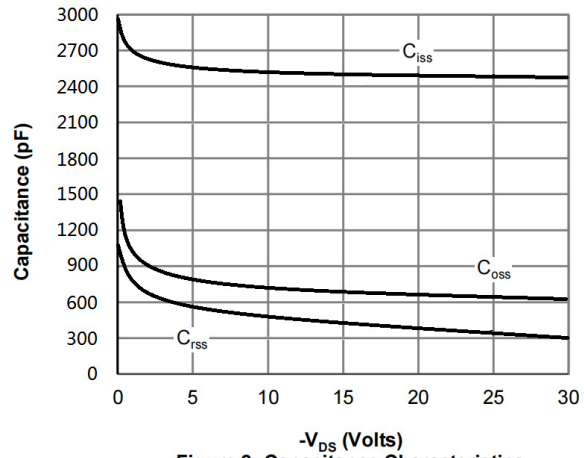


Figure 8: Capacitance Characteristics

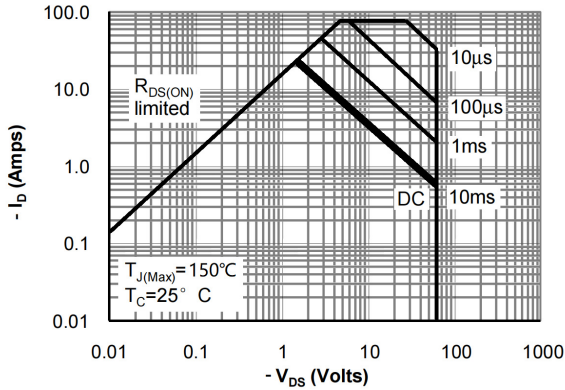


Figure 9: Maximum Forward Biased Safe Operating Area


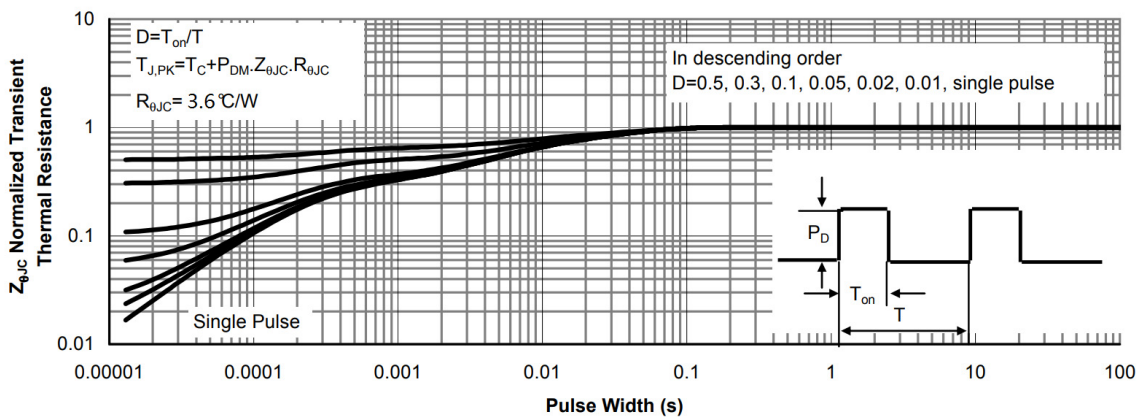


Figure 10: Normalized Maximum Transient Thermal Impedance

外形尺寸图 / Package Dimensions


PDFN3X3A-8L

Unit:mm

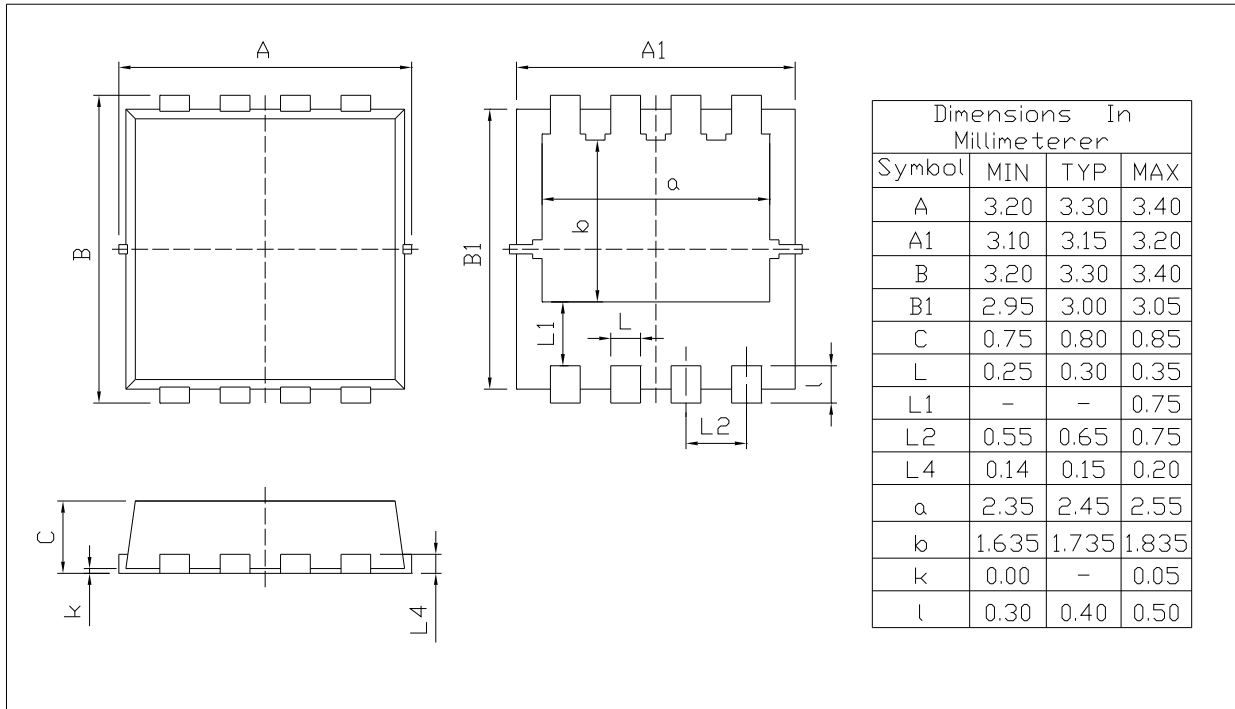

Rev.00 202011

印章说明 / Marking Instructions

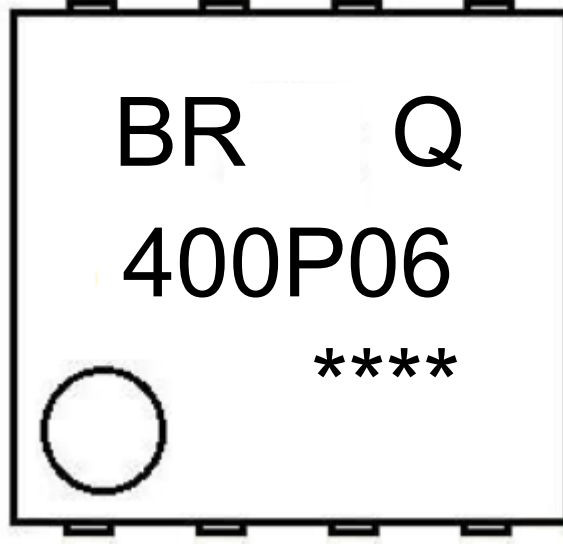

说明：

BR： 为公司代码

Q： 为汽车无卤产品标识

400P06： 为型号代码

****： 为生产批号代码，随生产批号变化


Note:

BR: Company Code

Q: Automobile halogen-free product Code

400P06: Product Type Code

****: Lot No. Code, code change with Lot No

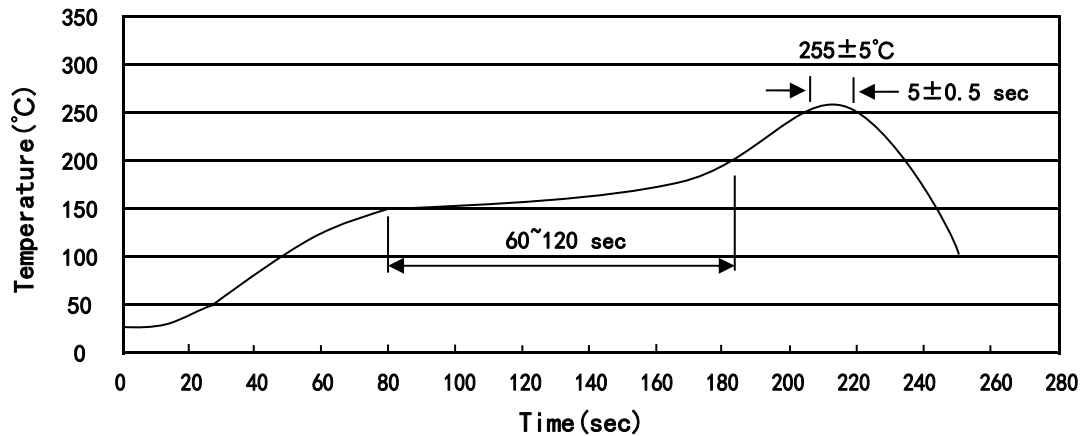回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)


说明：

- 1、预热温度 150~200°C，时间 60~120sec;
- 2、峰值温度 255±5°C，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2~10°C/sec.

Note:

- 1.Preheating:150~200°C, Time:60~120sec.
- 2.Peak Temp.:255±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度：260±5°C

时间：10±1 sec.

Temp.:260±5°C

Time:10±1 sec

包装规格 / Packaging SPEC.

卷盘包装 / REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
PDFN3×3A-8L	5,000	2	10,000	6	60,000	13" ×12	360×360×50	380×335×366

使用说明 / Notices