

描述 / Descriptions

SOT-323 塑封封装硅 NPN 数字三极管。Silicon NPN Digital Transistor in a SOT-323 Plastic Package.


特征 / Features

内装偏置电阻，简化线路设计，减少元件和制造流程，符合 AEC-Q101 标准高可靠性要求，无卤产品。
With built-in bias resistors, simplify circuit design, reduce a quantity of parts and manufacturing process, Qualified to AEC-Q101 Standards for High Reliability, HF Product.


用途 / Applications

用于开关、反相电路、界面电路以及驱动电路中，满足汽车应用的严格要求。
Switching, Inverter circuit, Interface circuit and driver circuit applications, Meet the stringent requirements of automotive applications.

内部等效电路 / Equivalent Circuit



引脚排列 / Pinning

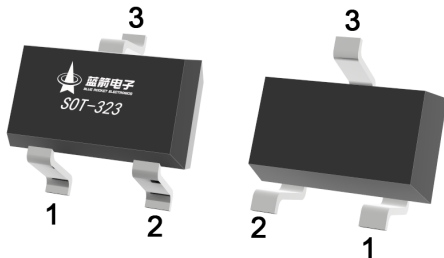

PIN1 : Base PIN 2 : Emitter PIN 3 : Collector

放大及印章代码 / hFE Classifications & Marking

Marking	Q26
---------	-----





极限参数 / Absolute Maximum Ratings(Ta=25°C)

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Output Voltage	V _{CC}	50	V
Input Voltage	V _{IN}	40	V
		-10	V
Output Current	I _C	100	mA
	I _O	30	mA
Collector Power Dissipation	P _C	200	mW
Junction Temperature	T _j	150	°C
Storage Temperature Range	T _{stg}	-55~150	°C

电性能参数 / Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Input Voltage	V _{I(off)}	V _{CC} =5.0V I _O =100μA			0.5	V
	V _{I(on)}	V _O =0.3V I _O =2.0mA	3.0			V
Output Voltage	V _{O(on)}	I _O =10 mA I _I =0.5mA			0.3	V
Input Current	I _I	V _I =5.0V			0.18	mA
Output Cut-off Current	I _{O(off)}	V _{CC} =50V V _I =0V			0.5	μA
DC Current Gain	G _I	V _O =5.0V I _O =5.0mA	68			
Transition Frequency	f _T	V _{CE} =10V I _E =-5.0mA f=100MHz		250		MHz
Resistance1	R ₁		32.9	47	61.1	KΩ
Resistance Ratio	R ₂ /R ₁		0.8	1.0	1.2	


电参数曲线图 / Electrical Characteristic Curve

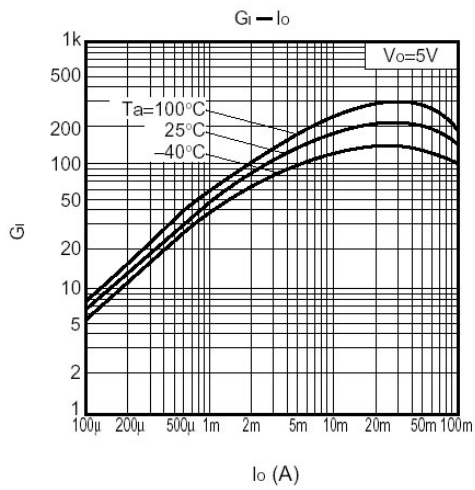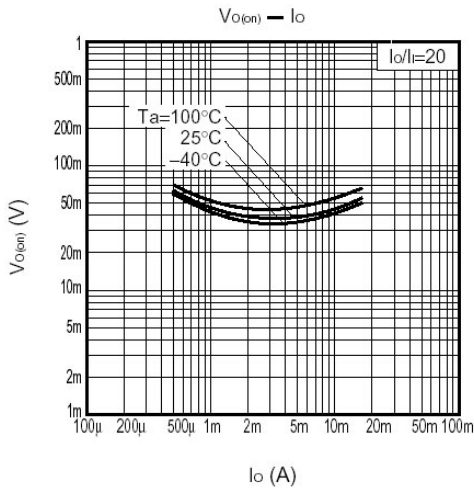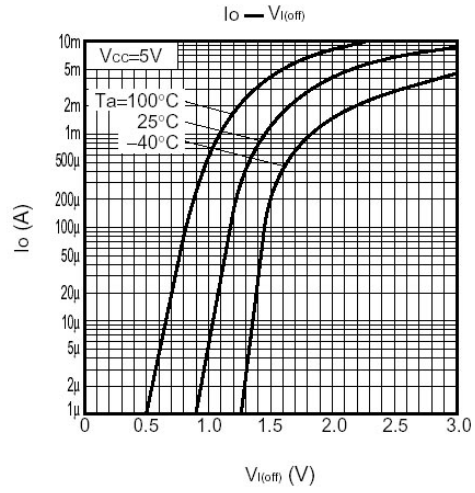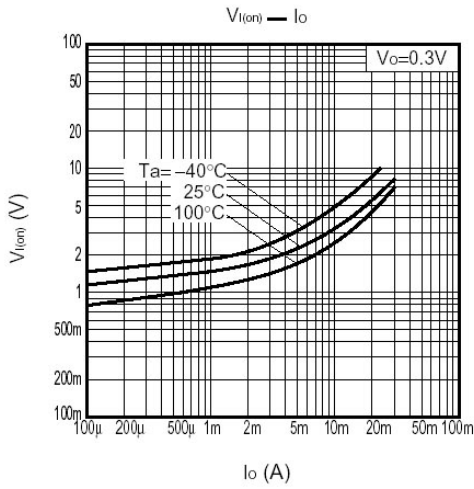


外形尺寸图 / Package Dimensions

SOT-323

单位：mm

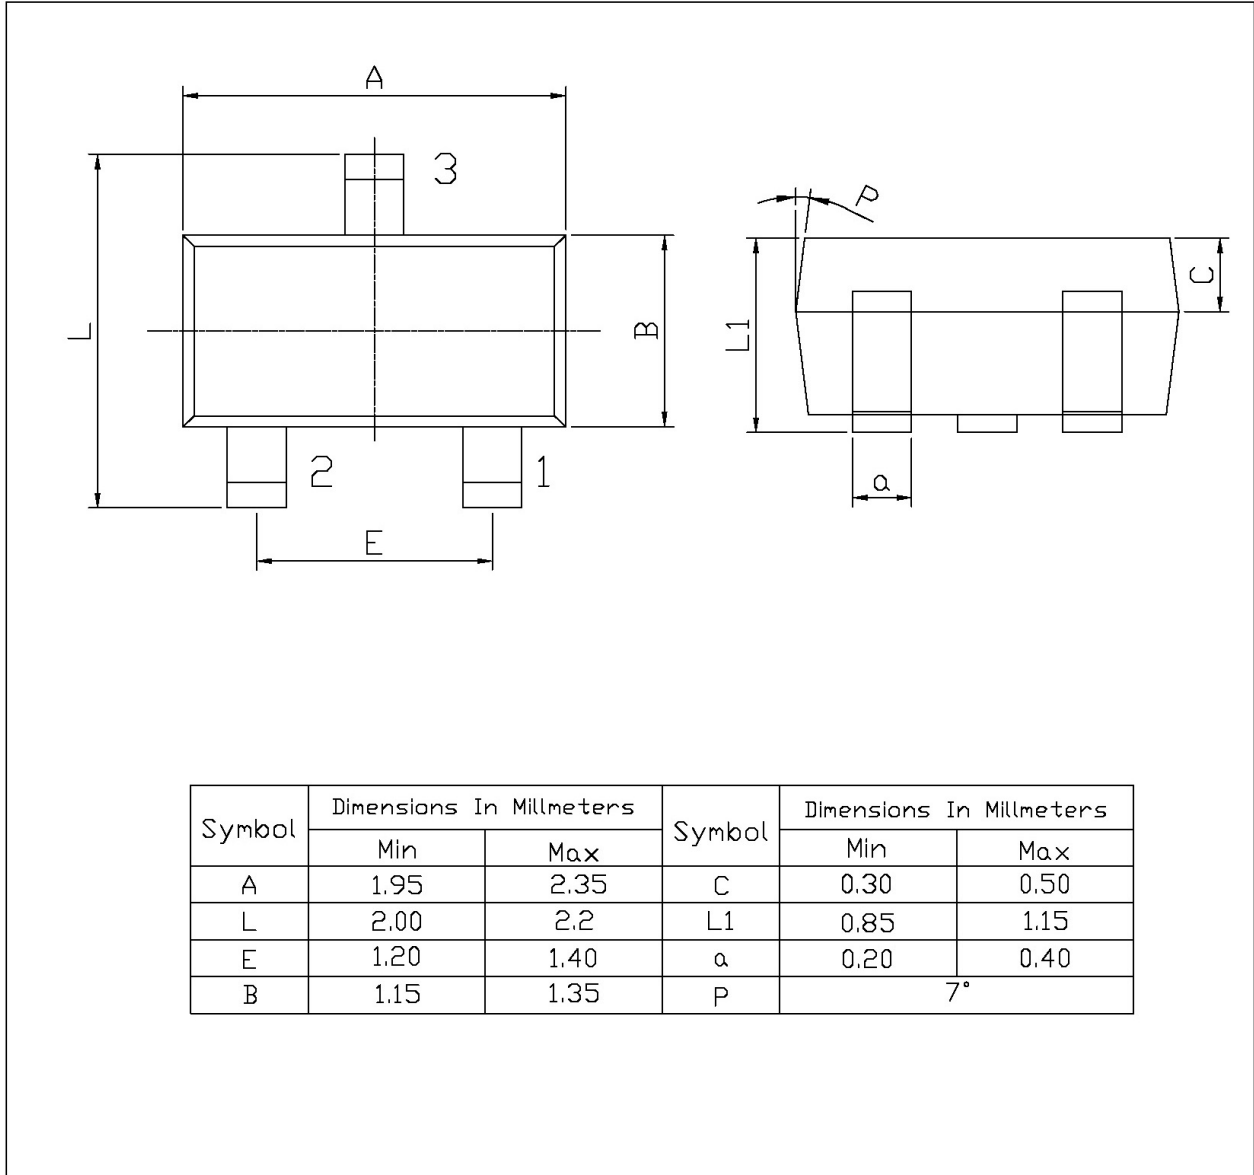

印章说明 / Marking Instructions

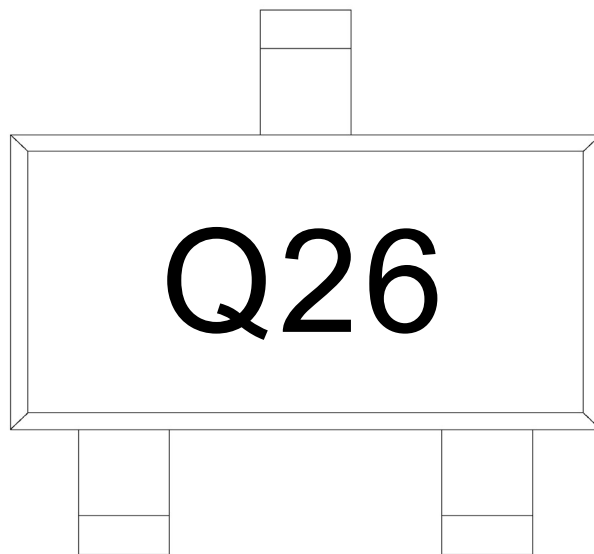

说明：


Q： 为汽车无卤产品标识

26： 为型号代码

Note:

Q: Automobile halogen-free product Code

26 : Product Type Code

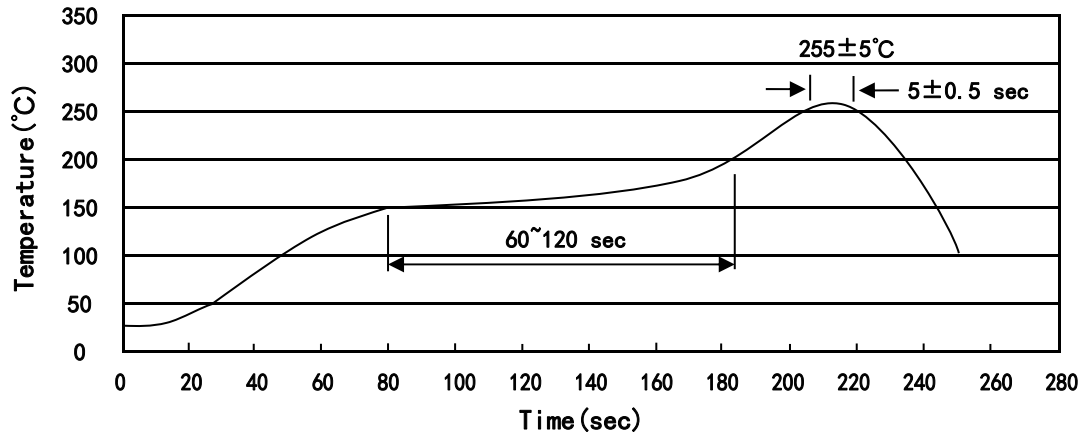回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)


说明：

- 1、预热温度 150 ~ 200°C，时间 60 ~ 120sec；
- 2、峰值温度 255±5°C，时间持续为 5±0.5sec；
- 3、焊接制程冷却速度为 2 ~ 10°C/sec.

Note:

- 1.Preheating:150~200°C, Time:60~120sec.
- 2.Peak Temp.:255±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度：260±5°C

时间：10±1 sec.

Temp:260±5°C

Time:10±1 sec

包装规格 / Packaging SPEC.

卷盘包装 / REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-323	3,000	10	30,000	6	180,000	7" × 8	180×120×180	390×385×205

使用说明 / Notices